


Cable White print
 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C
 ---c AWM I/II A 80°C 30V FT1 USB CABLE

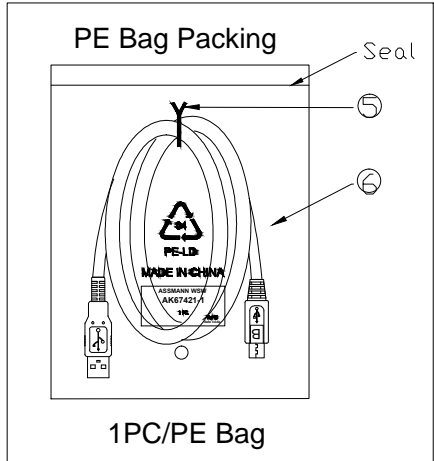

PIN ASSIGNMENT			
P1		P2	
1	Red	1	
2	White	2	
3	Green	3	
④ 5	Black	4	
Shell	Drain+Braid	Shell	

WSW P/N	Jacket color	Length(mm)
③ AK67421-0.3	Black	300±15
AK67421-0.5	Black	500±15
AK67421-1	Black	1000±20
AK67421-2	Black	2000±20
AK67421-3	Black	3000±30
AK67421-5	Black	5000±50

Electrical test:
 1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

NO.	NAME.	Q'TY	SPECIFICATION	
⑥	PE Bag	1	Clear	Print black "MADE IN CHINA"+ "1PC"
⑤	TIE	1	Black	
④	Out Jacket	NA	Black	PVC-45P
③	Cable	1	USB2.0 UL2725 (28#*1P+AL)+28#/2C+AEB	Black OD:3.5mm
②	CONN	1	Micro USB 5P B Male	Shell:Nickel Pin:G/F Insulator color: Black solder type
①	CONN	1	USB 2.0 A Male	Shell:Nickel Pin:G/F Insulator color: White solder type

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE		④	Update	13.07.2018	Xavier	Drawn	10.04.2013	Joanna
		③	Add 300mm	20.07.2016	Jesse	Approved	20.07.2016	Jesse
		②	Update drawing	12.04.2016	Amy			
DIM TOL		①	Update drawing	25.08.2014	Joanna			Drawing-No.
		①	Drawn	10.04.2013	Joanna			ASSMANN WSW-No.
Angle TOL		Id.	Modification	Date	Name			AK67421-x
								ASS 7091 CA rev04
								Replace Sheet 1/1